
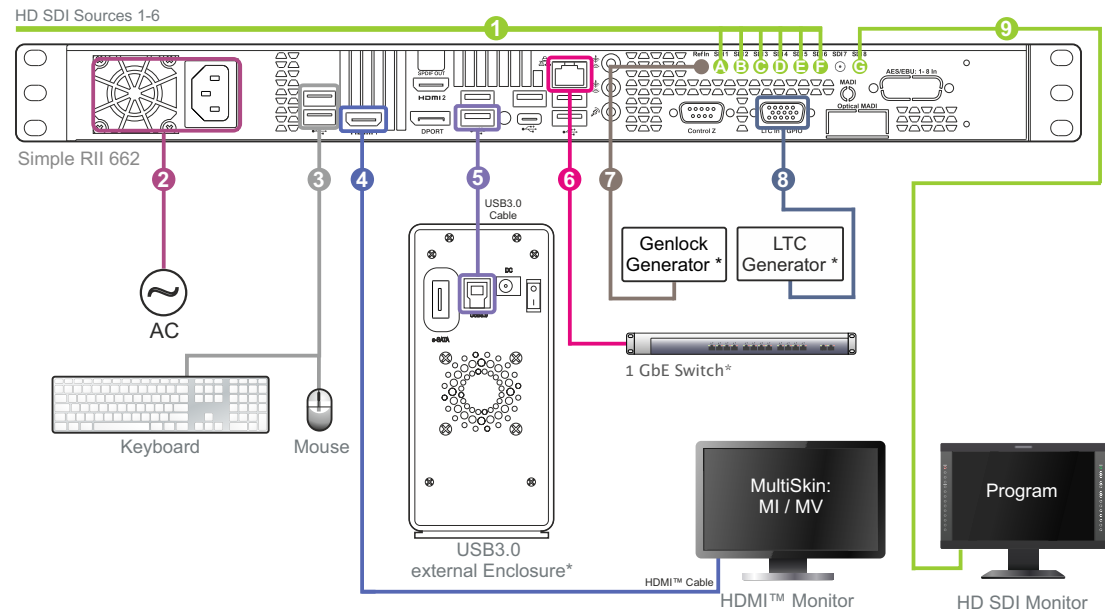


Simple RII 662. 6-channel HD Recording for NLE configuration with MultiSkin (MI/MV) on Graphics Port 1

6-channel Recording for NLE. 6 HD SDI inputs.

Graphics Port 1 - uses MultiSkin for displaying Main Interface (MI) or Multiviewer (MV). SDI Output - Program (PGM)

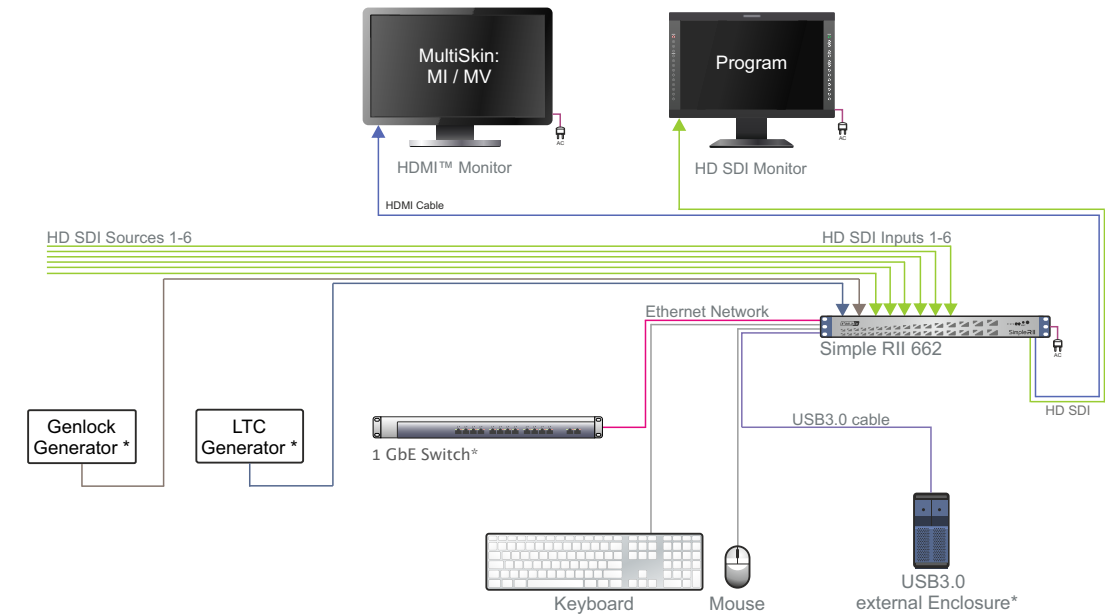

1 - HD SDI Inputs 1 - 6:

- A - Source 1
- B - Source 2
- C - Source 3
- D - Source 4
- E - Source 5
- F - Source 6

2 - AC110/220 V 60/50Hz

3 - Keyboard and Mouse

4 - HDMI™ 1920×1080 – MultiSkin: Main interface / Multiviewer

5 - USB 3.0 External Enclosure

6 - 1 GbE

7 - Reference Input

8 - LTC Input

9 - HD SDI Output – Program



Use Slomo 900.003.043.10 Cable for BNC Connections 1, 7,10



Use Slomo 900.020.040.01 Cable for LTC Input Connection

* – not included