
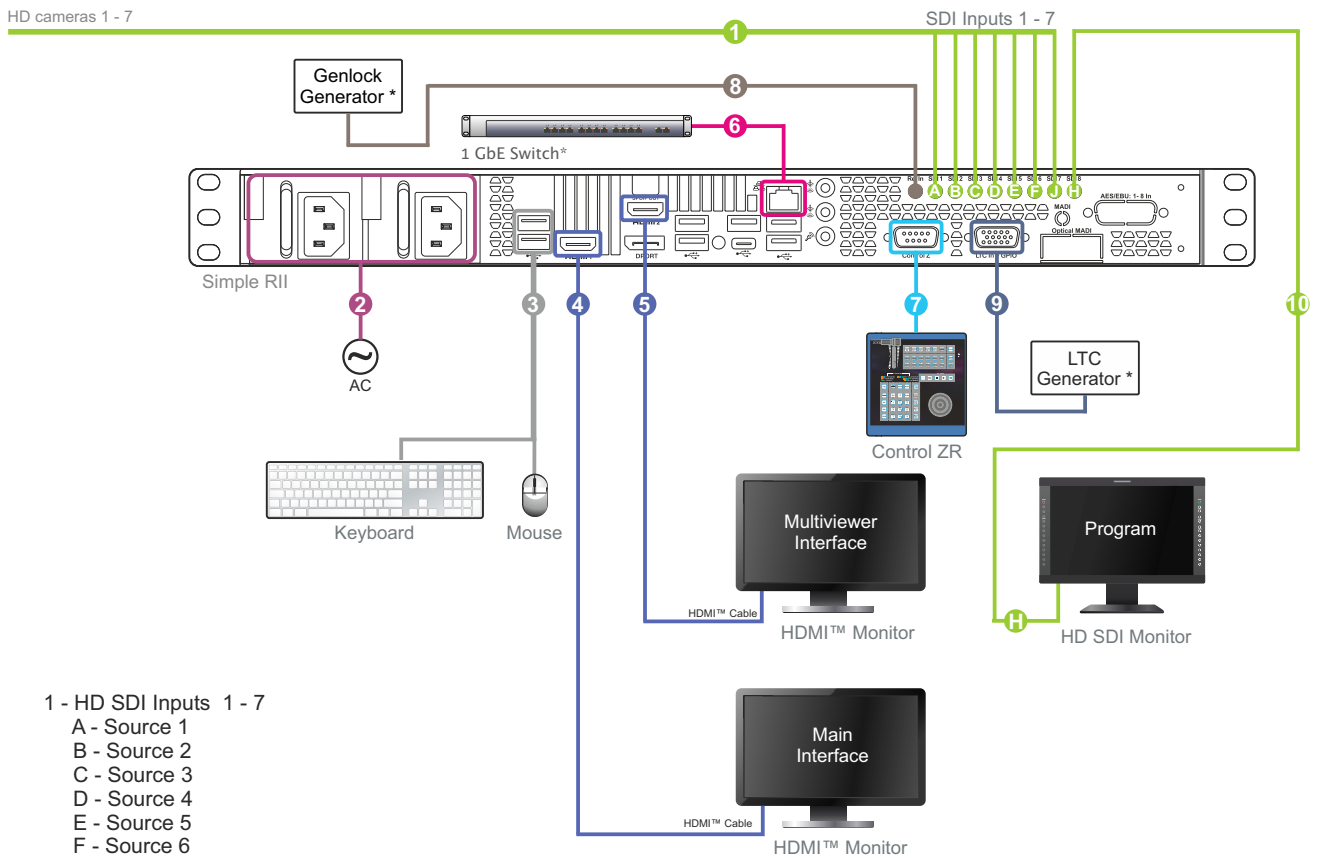


Simple R II 662. 7-channel HD Replay configuration

Replay configuration for 7 HD SDI channels. 7 HD SDI inputs.
Graphics Port 1 - Main Interface (MI), Graphics Port 2 - Multiviewer. HD SDI Output is used for Program.
With Redundant Power Supply Option

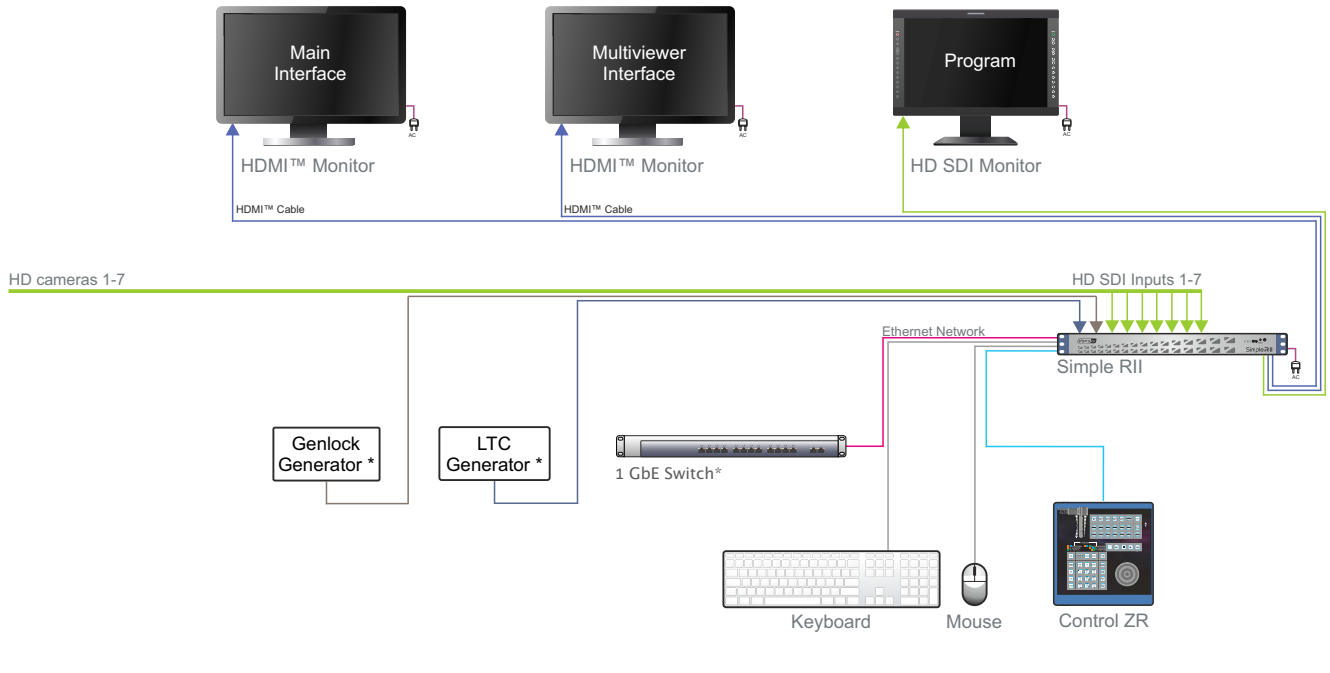

1 - HD SDI Inputs 1 - 7

- A - Source 1
- B - Source 2
- C - Source 3
- D - Source 4
- E - Source 5
- F - Source 6
- J - Source 7

2 - AC110/220 V 60/50Hz

3 - Keyboard and Mouse

4 - HDMI™ 1920×1080 – Main Interface

5 - HDMI™ 1920×1080 – Multiviewer Interface

6 - 1GbE

7 - Control ZR / ZR2 Remote Control

8 - Reference Input

9 - LTC Input

10 - SDI Output H - Program



Use Slomo 900.003.043.10 Cable
for BNC Connections 1, 10



Use Slomo 900.020.040.01 Cable
for LTC Input Connection

* – not included