


## VAR solution for 12 cameras. Hybrid configuration for Local use and VAR center

Up to 12-camera Video Assistant Referee solution.

The servers and engineer's workplaces are located in the arena and 2 main +1 extra VAR+AVAR+RO remote workplaces – at VAR center. The main camera images and Referee outputs of several matches can be duplicated to the VideoWall at VAR center.

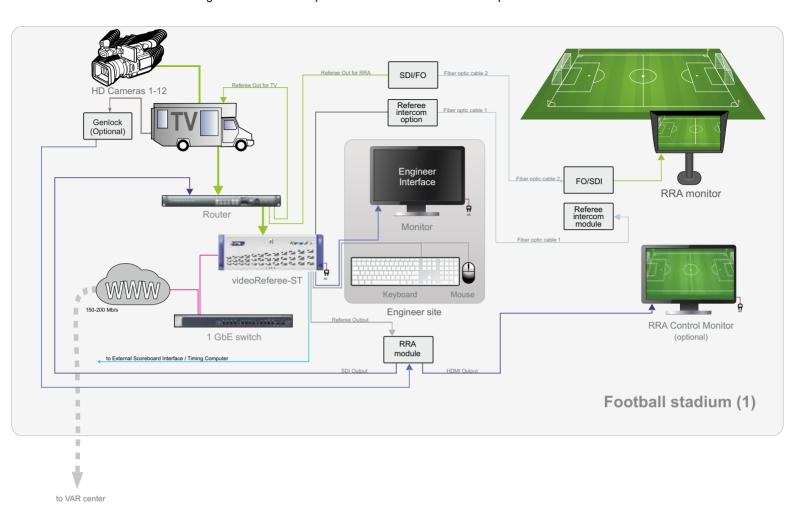

<sup>- 3</sup>G/HD-SDI

<sup>-</sup> Ethernet - HDMI™ / Display Port

RS-232/ RS-422 / RS-485 to Scoreboard Power

<sup>-</sup> USB

<sup>-</sup> Fiber optic



## VAR solution for 12 cameras. Hybrid configuration for Local use and VAR center

Up to 12-camera Video Assistant Referee solution.

The servers and engineer's workplaces are located in the arena and 2 main +1 extra VAR+AVAR+RO remote workplaces – at VAR center.

The main camera images and Referee outputs of several matches can be duplicated to the VideoWall at VAR center.

